


Installing the Casing Anchor

Casing Anchor Components

Supplied parts include the anchor, a large O-ring, and four screws.

You must provide ABS cement, tape, and a release cord of appropriate length. We suggest cord that is rated for 250 kg or 500 lb.

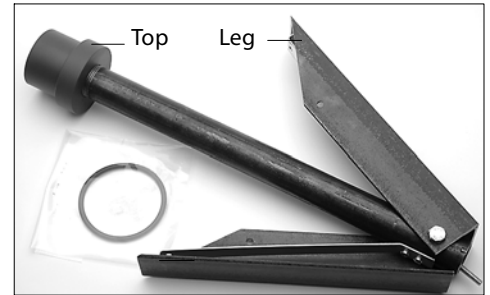


Step 1

1. Hold legs closed. Slip O-ring over one leg.
2. Wrap O-ring behind pipe.
3. Slip O-ring over other leg.




Step 2

1. Cut off end of casing.
2. Glue top of anchor to casing with ABS cement and secure with self-tapping screws.
3. Tape joint well to prevent entry of grout.

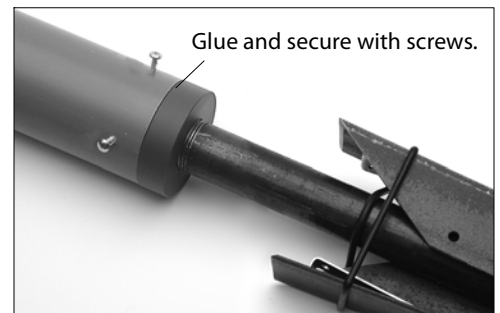

Step 3

1. Tie release cord onto O-ring.
2. Devise method for handling release cord as the casing is installed down hole.

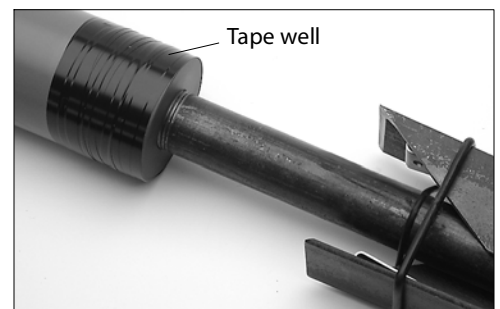

Deploying the Anchor

1. Pull drill casing, if any, above elevation of anchor so that anchor is not deployed inside.
2. Pull release cord and retrieve cord and O-ring.
3. Backfill borehole as specified. Check that casing remains anchored.